

Polecrete®

STABILIZER

The Original Polyurethane
Backfill Solution



FAST
STRONG
PORTABLE



Polecrete® STABILIZER

2-part Post Setting Foam for Faster and Stronger Results

FAST Mixes in 30 seconds, sets in 15 minutes.

STRONG Permanent holding strength.

PORTABLE Lightweight and easy to carry.

Key Advantages

- Field proven with major utilities since 1988
- Reduces costs due to labor efficiency
- Eliminates hauling rock and tamping
- Ideal in sand, rock and poor soil conditions
- Prevents ground line wood pole decay
- Works year-round in any temperature
- Classified non-hazardous by EPA and DOT



Works with all pole types:

- Wood
- Composite
- Metal
- Concrete

Works in many

industries:

- Construction
- Utility
- Signage
- Fencing
- Transportation
- Renewable Energy
- High Mast Lighting
- Pole & Post Installation



The speed and strength of **Polecrete® Stabilizer** helps to quickly restore power.



TYPICAL PHYSICAL PROPERTIES			
	STANDARD	HD	HYDRO
Free Rise Core Density (ASTM D1622)	4.0 pcf ± 0.2	6.0 pcf ± 0.2	5.0 pcf ± 0.2
Compressive Strength (ASTM D1621)	≥ 80 psi	≥ 150 psi	≥ 80 psi
Flexural Strength (ASTM C203)	≥ 90 psi	≥ 150 psi	≥ 168 psi
Tensile Strength (ASTM D1623)	≥ 90 psi	≥ 150 psi	≥ 90 psi
Water Absorption (ASTM D2842)	< 2% volume	< 2% volume	< 2% volume
Set Time (@ 77°F)	15 minutes	15 minutes	15 minutes

PACKAGING		
KIT SIZES (approx. yield)	WEIGHT PER KIT	KITS/PALLET
2.5 Cubic Feet	12.0 lb.	80
3.75 Cubic Feet	16.5 lb.	80
5 Cubic Feet	22 lb.	80
6 Cubic Feet	33.8 lb.	42
7 Cubic Feet	41.6 lb.	42
10 Cubic Feet	45 lb.	24




Polecrete® Stabilizer is a USDA Certified Biobased Product which contains 44% USDA certified biobased content. The USDA Certified Biobased product label is a certification mark of the U.S. Department of Agriculture.



BMK Product Family



WATCH POLECRETE® STABILIZER IN ACTION!

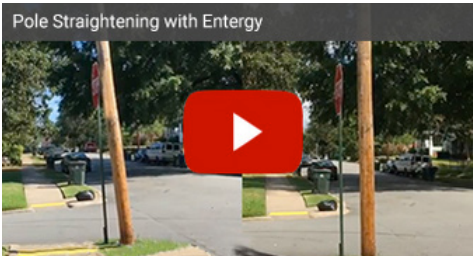

Professional crews using
BMK products.



bmkproducts.com

314.344.3330